


Produktübersicht Conductive Polymer Hybrid-Caps Fab. SAMWHA

CapComp GmbH - Gründelbachstr. 10 - D-71691 Freiberg/Neckar

www.capcomp.de - shop24.capcomp.de - Tel: +49 7141 298950

Stand 01.06.2023

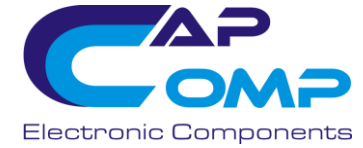

Series	Part Number	Voltage (V)	Capacity (uF)	ESR (mΩ)		Ripple (mA rms) 100kHz	Temp (°C)	Lifetime (h)	Weight (g)	Packaging (pcs)	Dimension (mm)			
				AC (100kHz)	DC						D	L	P	d
YL - Typ Radial Lead	YL1H476M6L07MBB	50	47	40		1.500	125	4.000	0,43	6000	6,3	7,5	2,5	0,45
	YL1J826M1009MBB	63	82	30		2.000	125	4.000	1,3	2400	10	9,5	5,0	0,60
	YL1V107M6L07MBB	35	100	35		1.700	125	4.000	0,43	6000	6,3	7,5	2,5	0,45
	YL1H107M0809MBB	50	100	30		1.700	125	4.000	0,83	3600	8	9,5	3,5	0,60
	YL1J107M10012BB	63	100	22		3.000	125	4.000	1,65	2400	10	12	5,0	0,60
	YL1E157M6L07MBB	25	150	30		1.800	125	4.000	0,43	6000	6,3	7,5	2,5	0,45
	YL1V157M0809MBB	35	150	27		2.000	125	4.000	0,83	3600	8	9,5	3,5	0,60
	YL1H157M1009MBB	50	150	25		2.000	125	4.000	1,3	2400	10	9,5	5,0	0,60
	YL1H227M10012BB	50	220	19		3.200	125	4.000	1,65	2400	10	12	5,0	0,60
	YL1V277M1009MBB	35	270				125	4.000	1,3	2400	10	9,5	5,0	0,60
	YL1V337M1009MBB	35	330	20		2.800	125	4.000	1,3	2400	10	9,5	5,0	0,60
	YL1V397M10012BB	35	390	17		3.500	125	4.000	1,65	2400	10	12	5,0	0,60
YL1V477M10012BB	35	470				125	4.000	1,65	2400	10	12	5,0	0,60	
YL1E567M1009MBB	25	560	20		2.800	125	4.000	1,3	2400	10	9,5	5,0	0,60	

