

Produktübersicht ULTRACAP Großzellen Fab. SAMWHA

CapComp GmbH - Gründelbachstr. 10 - D-71691 Freiberg/Neckar



www.capcomp.de - shop24.capcomp.de - Tel: +49 7141 298950

Stand 01.06.2023




Series	Part Number	Voltage (V)	Capacity (F)	ESR (mΩ)		LC (mA) (RT 72hrs)	Rated Current (A) 15/40°C	Peak Current (A)	Max Energy Stored (Wh)	Max Energy Density (Wh/Kg)	Weight (g)	Packaging (pcs/carton)	Dimension (mm)		
				AC@(1kHz)	DC								Diameter	L1	L2
DH (schraub)	DH5U128W60074TH	2,7	1200	0,30	0,33	2,7	98/159	1160	1,22	4,26	285		60,4	74	100
	DH5U168W60085TH	2,7	1600	0,25	0,28	3,0	115/188	1492	1,62	4,98	325		60,4	85	111
	DH5U208W60102TH	2,7	2000	0,24	0,27	4,0	126/206	1753	2,03	5,26	385		60,4	102	128
	DH5U308W60138TH	2,7	3000	0,20	0,23	5,0	150/245	2396	3,04	5,96	510		60,4	138	164
	DH5U348W60138TH	2,7	3400	0,25	0,28	9,2	130/210	2351	3,44	6,68	515		60,4	138	164
DH (schweiß)	DH5U128W60074WD	2,7	1200	0,30	0,33	2,7	98/159	1160	1,22	4,26	285		60,4	74	80
	DH5U168W60085WD	2,7	1600	0,25	0,28	3,0	115/188	1492	1,62	4,98	325		60,4	85	91
	DH5U208W60102WD	2,7	2000	0,24	0,27	4,0	126/206	1753	2,03	5,26	385		60,4	102	108
	DH5U308W60138WD	2,7	3000	0,20	0,23	5,0	150/245	2396	3,04	5,96	510		60,4	138	144
	DH5U348W60138WD	2,7	3400	0,25	0,28	9,2	130/210	2351	3,44	6,68	515		60,4	138	144
DV (schraub)	DV5R128W60074TH	2,85	1200	0,33	0,36	3,4	94/153	1194	1,35	4,75	285		60,4	74	100
	DV5R168W60085TH	2,85	1600	0,28	0,31	4,6	109/178	1524	1,81	5,55	325		60,4	85	111
	DV5R208W60102TH	2,85	2000	0,27	0,30	5,7	120/195	1781	2,26	5,86	385		60,4	102	128
	DV5R308W60138TH	2,85	3000	0,20	0,23	7,0	150/245	2530	3,38	6,57	515		60,4	138	164
	DV5R348W60138TH	2,85	3400	0,20	0,23	8,0	150/245	2175	3,84	7,45	515		60,4	138	164
DV (schweiß)	DV5R128W60074WD	2,85	1200	0,33	0,36	3,4	94/153	1194	1,35	4,75	285		60,4	74	80
	DV5R168W60085WD	2,85	1600	0,28	0,31	4,6	109/178	1524	1,81	5,55	325		60,4	85	91
	DV5R208W60102WD	2,85	2000	0,27	0,30	5,7	120/195	1781	2,26	5,86	385		60,4	102	108
	DV5R308W60138WD	2,85	3000	0,20	0,23	7,0	150/245	2530	3,38	6,57	515		60,4	138	144
	DV5R348W60138WD	2,85	3400	0,20	0,23	8,0	150/245	2175	3,84	7,45	515		60,4	138	144
DV	DV0U308W60138TH	3,0	3000	0,20	0,23	7,0	150/245	2663	3,75	7,21	520		60,4	138	164
	DV0U308W60138WD	3,0	3000	0,20	0,23	7,0	150/245	2663	3,75	7,21	520		60,4	138	144

Threaded Type

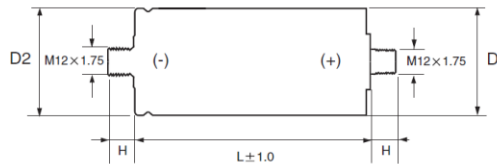

Weldable Type

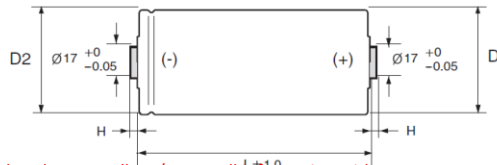

Hinweis: Alle Angaben ohne Gewähr. Verbindlich sind die jeweiligen Angaben auf dem Datenblatt des Herstellers / Note: All information without guarantee. The respective information on the manufacturer's data sheet is binding.