

Produktübersicht ULTRACAP mittlere Zellen Fab. CAP-XX

CapComp GmbH - Gründelbachstr. 10 - D-71691 Freiberg/Neckar


www.capcomp.de - shop24.capcomp.de - Tel: +49 7141 298950

Stand 02.04.2024




Series	Part Number	Voltage (V)	Capacity (F)	ESR (mΩ)		LC (mA) (RT) 72hrs	Rated Current (A) 15/40°C	Peak Current (A)	Max Energy Stored (Wh)	Max Energy Density (Wh/Kg)	Weight (g)	Packaging (pcs) bulk/carton	Dimension (mm)		
				AC@(1kHz)	DC								D	L1	L2
GY1 Serie SnapIn	GY13R022045V107S	3,0	100	8	12	0,3			0,125		21		22	45	51
	GY13R022045V127S	3,0	120	8	12	0,3			0,150		21		22	45	51
	GY13R022055V167S	3,0	160	8	12	0,5			0,200		30		22	55	51
	GY13R025055V157S	3,0	150	7	11	0,5			0,188		30		25	50	56
	GY13R030050V207S	3,0	200	6	10	0,7			0,250		36		30	50	56
	GY13R030050V227S	3,0	220	7	11	0,7			0,275		39		30	50	56
	GY13R030050V247S	3,0	240	7	11	0,7			0,300		40		30	50	56
	GY13R035060V357W	3,0	350	3,1	3,6	1,0			0,438		73		35	60	66
	GY13R035060V407W	3,0	400	2,9	3,3	1,2			0,500		73		35	60	66
	GY13R035060V477W	3,0	470	3,1	3,6	1,3			0,588		73		35	60	66
	GY13R035067V507W	3,0	500	3,0	3,5	1,3			0,625		76		35	67	72
	GY13R035070V607W	3,0	600	2,5	3,0	1,5			0,750		88		35	70	76
	GY13R035060V357C	3,0	350	3,1	3,6	1,0			0,438		73		35	60	66
	GY13R035060V407C	3,0	400	2,9	3,3	1,2			0,500		73		35	60	66
	GY13R035060V477C	3,0	470	3,1	3,6	1,3			0,588		73		35	60	66
GY13R035067V507C	3,0	500	3,0	3,5	1,3			0,625		76		35	67	72	
GY13R035070V607C	3,0	600	2,5	3,0	1,5			0,750		88		35	70	76	


S type terminals:

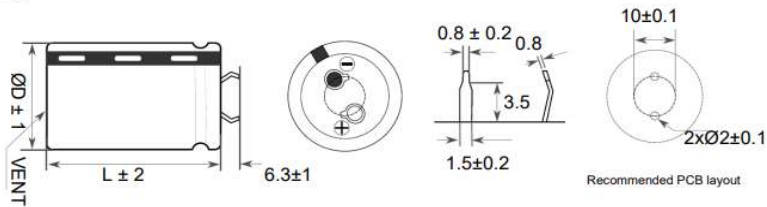

W type terminals, only available ØD ≥ 35mm:

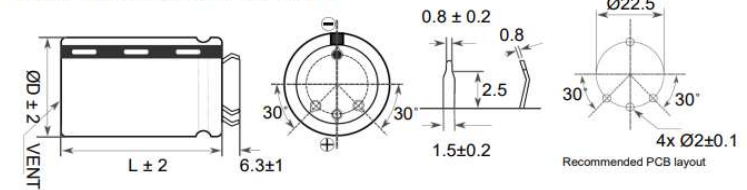

C type terminals, only available ØD ≥ 35mm:

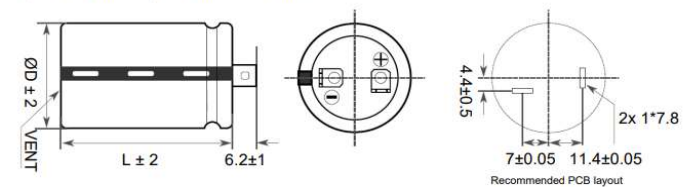

Kein Bild