

Produktübersicht Conductive Polymer Hybrid-Caps Fab. SAMWHA


CapComp GmbH - Gründelbachstr. 10 - D-71691 Freiberg/Neckar

www.capcomp.de - shop24.capcomp.de - Tel: +49 7141 298950

Stand 01.06.2023



Series	Part Number	Voltage (V)	Capacity (uF)	ESR (mΩ)		Ripple (mA rms) 100kHz	Temp (°C)	Lifetime (h)	Weight (g)	Packaging (pcs)	Dimension (mm)			
				AC (100kHz)	DC						D	L	P	d
YB - Typ Radial Lead	YB1J226M6L07MBB	63	22	80		1.500	105	10.000	0,43	6.000	6,3	7,5	2,5	0,45
	YB1V476M6L07MBB	35	47	35		2.000	105	10.000	0,43	6.000	6,3	7,5	2,5	0,45
	YB1K476M1009MBB	80	47	32		1.800	105	10.000	1,3	2.400	10	9,5	5,0	0,60
	YB1J566M1009MBB	63	56	30		1.800	105	10.000	1,3	2.400	10	9,5	5,0	0,60
	YB1J686M10012BB	63	68	22		2.100	105	10.000	1,65	2.400	10	12	5,0	0,60
	YB1E107M6L07MBB	25	100	30		2.000	105	10.000	0,43	6.000	6,3	7,5	2,5	0,45
	YB1V107M6L07MBB	35	100	27		2.300	105	10.000	0,43	6.000	6,3	7,5	2,5	0,45
	YB1V107M0809MBB	35	100	27		2.300	105	10.000	0,83	3.600	8,0	9,5	3,5	0,60
	YB1H107M1009MBB	50	100	25		2.000	105	10.000	1,3	2.400	10	9,5	5,0	0,60
	YB1V157M0809MBB	35	150	27		2.300	105	10.000	0,83	3.600	8,0	9,5	3,5	0,60
	YB1E157M0809MBB	25	150	27		2.300	105	10.000	0,83	3.600	8,0	9,5	3,5	0,60
	YB1V157M1009MBB	35	150	20		2.500	105	10.000	1,3	2.400	10	9,5	5,0	0,60
	YB1E227M0809MBB	25	220	27		2.300	105	10.000	0,83	3.600	8,0	9,5	3,5	0,60
	YB1V277M1009MBB	35	270	20		2.500	105	10.000	1,3	2.400	10	9,5	5,0	0,60
	YB1E337M1009MBB	25	330	20		2.500	105	10.000	1,3	2.400	10	9,5	5,0	0,60
	YB1V337M10012BB	35	330	17		2.800	105	10.000	1,65	2.400	10	12	5,0	0,60
YB1E477M1009MBB	25	470	16		2.800	105	10.000	1,3	2.400	10	9,5	5,0	0,60	
YB1E477M10012BB	25	470	16		2.800	105	10.000	1,65	2.400	10	12	5,0	0,60	
YB1C567M10012BB	16	560	14		3.000	105	10.000	1,65	2.400	10	12	5,0	0,60	

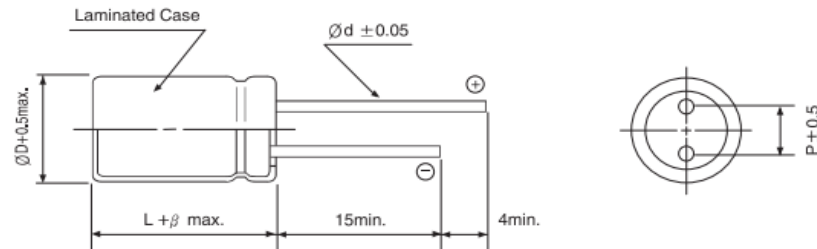

Hinweis: Alle Angaben ohne Gewähr. Verbindlich sind die jeweiligen Angaben auf dem Datenblatt des Herstellers / Note: All information without guarantee. The respective information on the manufacturer's data sheet is binding.