


Produktübersicht ULTRACAP mittlere Zellen Fab. SAMWHA



CapComp GmbH - Gründelbachstr. 10 - D-71691 Freiberg/Neckar

www.capcomp.de - shop24.capcomp.de - Tel: +49 7141 298950

Stand 01.06.2023

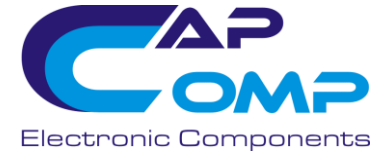

Series	Part Number	Voltage (V)	Capacity (F)	ESR (mΩ)		LC (mA) (RT 72hrs)	Rated Current (A) 15/40°C	Peak Current (A)	Max Energy Stored (Wh)	Max Energy Density (Wh/Kg)	Weight (g)	Packaging (pcs/carton)	Dimension (mm)		
				AC@(1kHz)	DC								Diameter	L1	L2
DB SnapIn	DB5U107W22045HA	2.7	100	7,0	9,0	0,26	12,5/20	71,1	0,10	4,82	21		22	45	51
	DB5U127W22047HA	2.7	120	7,0	9,0	0,32	12,5/20	77,9	0,12	5,28	23		22	47	53
	DB5U207W30045HA	2.7	200	6,0	8,0	0,54	13/21	103,8	0,20	5,33	38		30	45	51
	DB5U307W35050HA	2.7	300	3,5	5,0	0,81	16/26,5	162	0,30	5,33	57		35	50	56
	DB5U367W35060HA	2.7	360	3,0	3,2	0,75	23/38	225,8	0,37	5,13	71		35	60	66
	DB5U407W35060HA	2.7	400	3,0	3,2	0,83	23/38	236,8	0,41	5,70	71		35	60	66
	DB5U407W35065HA	2.7	400	2,8	3,0	1,00	25/40	245,5	0,41	5,60	80		35	65	71
	DB5U457W35070HA	2.7	450	2,8	3,0	1,00	25/40	258,5	0,46	5,18	88		35	70	76
	DB5U507W35070HA	2.7	500	2,9	3,1	1,10	25/40	264,7	0,51	5,69	89		35	70	76
	DB5U607W35070HA	2.7	600	3,0	3,2	1,30	25/40	277,4	0,61	6,75	90		35	70	76
DB5U607W35085HA	2.7	600	2,8	3,0	1,30	25/40	289,3	0,61	6,08	100		35	85	91	
DK SnapIn +85Grad	DK5U107W22045HA	2.7	100	8,0	10,0	0,27	12/19	68	0,10	4,82	21		22	45	51
	DK5U207W30045HA	2.7	200	7,0	9,0	0,54	12,5/20	96	0,20	5,33	38		30	45	51
	DK5U307W35050HA	2.7	300	3,5	5,0	0,81	16,5/27	162	0,30	5,33	57		35	50	56
	DK5U367W35060HA	2.7	360	3,2	3,8	0,97	21,5/35	205	0,37	5,13	71		35	60	66
	DK5U407W35060HA	2.7	400	3,2	3,8	1,08	21,5/35	214	0,41	5,70	71		35	60	66

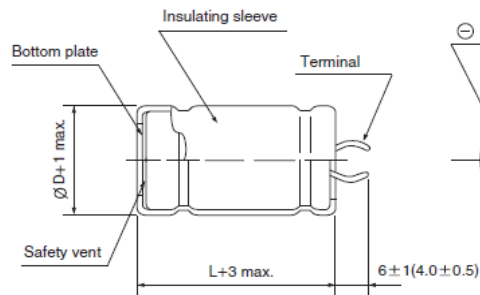

PC Board Mounting Holes

Terminal

